

Designed to provide an extremely stable support for standard **EFP** configurations, the **C20S** is ready to operate with a wide range of cameras weighing from 7 to 25 Kg (15 to 55 lbs).

C20S features three award winning fluid damping modules assuring outstanding drag levels and extraordinary smoothness in both pan and tilt modes.

Movements can be selected with 7 precisely repeatable steps of drag, while free wheeling is available by simply setting the drag selector ring into position "0".

Counterbalance is activated by an easy grip selector in 7 progressive steps and "0".

The **C20S** comes with a 100mm bowl base, illuminated spirit level and two telescopic pan bars. A 150 mm bowl base is also available as an option.

■ specifications

Payload capacity: 25 Kg (55 lbs)

Weight: 6,5 Kg (14 lbs)

Pan range: 360°


Tilt range: +/- 65°

Counterbalance: 7 steps + 0

Fluid drag: 7 + 7

Bowl diameter: 100/150mm

Temp. range: -40°/+60°C (-40°/+158°F)

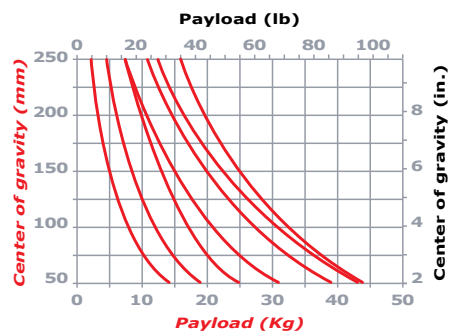

accessories ■

A 850/C 2



A 845



D 734

